



99. Men's cuffs :

1. Place set-up within the needle-cylinder.



2. Hold within 1/2 inch from top of cylinder.
3. Have every other needle out of cylinder.
4. Set up in the usual manner,
5. Only with a long half inch loop.
6. After knitting one round with regular yarn,
7. Place a small ball of yarn inside
8. Of cylinder, preferably a second color.
9. With this second yarn set up a second time,
10. Commencing in front of yarn-carrier.
11. Continue setting up, always in advance




- MEN'S CUFFS—*continued.*
12. Of the yarn-carrier, knitting one row,
 13. For each setting up, always keeping
 14. The set-up loops the same length, or
 15. About \emptyset inch long, as preferred.
 16. Knit 10, 12 or 15 rounds with
 17. The half inch loop between each row, until
 18. The looping is as wide as desired.
 19. Now knit the cuff, or put
 20. On ribber and make one and one rib.
 21. Remove set-up and again place on the
 22. Inside of cylinder for second cuff.
 23. And in this manner, knit them
 24. In one continuous web, or single, as desired.


MEN'S GLOVES.

100. Hand and 1st finger:

1. Knit either flat-web or circular web,
2. According to size of glove required.
3. Knit wrist and thumb same as for mitts.
4. Knit hand 2 inches or 20 to 25 rounds, then
5. Run the work entirely off the machine.
6. Knit a second hand similar to the first.
7. Remove all needles from cylinder, except 1/4
8. On front of machine. Place in cylinder on left,
9. One needle, making one needle more than 4
10. On these needles, knit first finger, by
11. Lifting the stitch which is closest to
12. The left side of thumb or left selvedge.
13. Place this stitch on the middle finger needle.
14. Lift stitches from both sides of the hand.
15. Place them on their respective needles,
16. Until one stitch more than 1/4 of hand stitches,
17. Are lifted, thread the yarn carrier, and
18. Knit one row to the right side of web.
19. Place one needle in first empty groove,
20. On the right side of the machine.
21. Place a stitch on it from needle on the left.
22. Lift last stitch cast off by side-needle.
23. Knit one more row to the left side.
24. Place a second needle in first empty groove
25. On the left, place a stitch thereon.
26. Knit one row to the right side.
27. Place a second needle in first empty groove
28. On the right : place stitch thereon.



29. Knit flat-web three inches or about 30 rounds.
80. Run stitches off proceed to knit second or large finger.

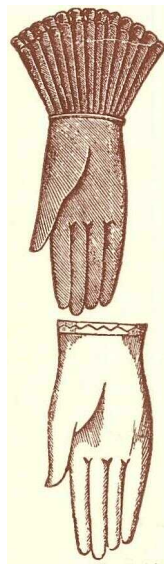

101. 2nd finger :

1. Place 1/8 of hand stitches from front of hand,
2. On the needles which are to the extreme right.
3. Place three stitches from the selvedge edge, formed
4. By the three widened needles which were put into the machine.
5. Lift two of the stitches from the front selvedge widening,
6. And one stitch from the back widening next selvedge.
7. Place them on the next three needles to the left, then
8. Place 1/8 of hand stitches from back of hand.
9. On the remaining needles on the left side.
10. Place yarn in carrier and knit to the right,
11. Place it on the right side, one needle, and
12. Place in on the left side one needle ; place stitches thereon.
13. Knit one row, place second needle on the right with stitch.
14. This makes second finger three stitches larger than first.
15. Knit 3 1/2 inches, or about 35 to 40 rows.
16. Run stitches off and proceed to third finger.