

TO SET UP THE WORK

Wind the yarn on the bobbin loosely, or for family work use the yarn from a ball wound loosely to unravel from the inside, you will get better results from the ball than from any amateur wound bobbin, and set on floor as shown. Pass the end of the yarn through the hole in the carrier at E, Fig. 2. Draw through about 5 ft. of the yarn, or enough to make the first round of stitches. Place the set-up ring inside of the cylinder and begin to set up the work close to the carrier on the front of the machine, by placing the yarn under the end of the wire turning to the right and around the needle turning to left, and so on until you get to the needles under the cams; now put on the weights or press the work down with the fingers and turn the machine slowly forward until the empty needles are out of the cams, and continue setting up until you get to the needle you started at, and you better put an extra stitch on three or four so as to secure the yarn. In this operation you must turn the set-up ring, so that the end follows along with the needles as the loops are thrown on. You will notice by setting up this way, turning to the right on wire and to the left on the needle, that the loop is crossed between the wire and the needle, thus preventing the top from raveling out.

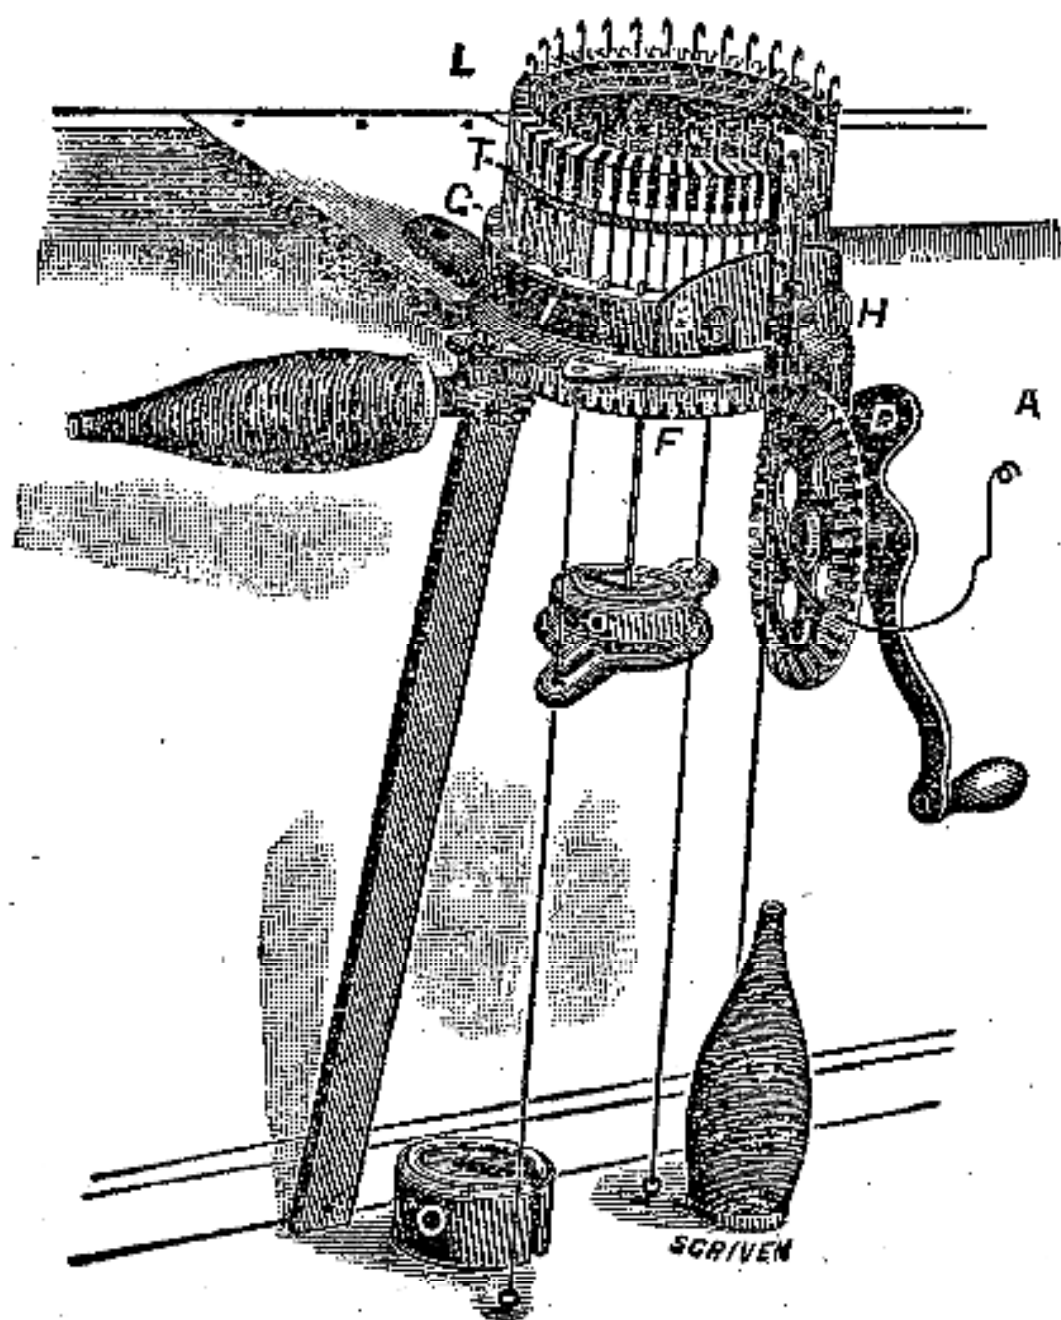


Fig. 1.

TO KNIT A SOCK

Set up the work as directed, or if you desire a mock rib top, take every fourth needle from the cylinder, and after having knit as much of this top as required, replace the needles in the cylinder and continue to knit until the leg of the sock or stocking is the desired length.